


RO1: A retrospective cost and performance analysis of EPA's 50 full-scale treatment pilots.

Treatment Tech.	No. of Systems
AM	28
IR	8
IR + AM	4
IR + IA	2
C/F	4
IX	2
RO	1
POU RO	1
System Mod	1

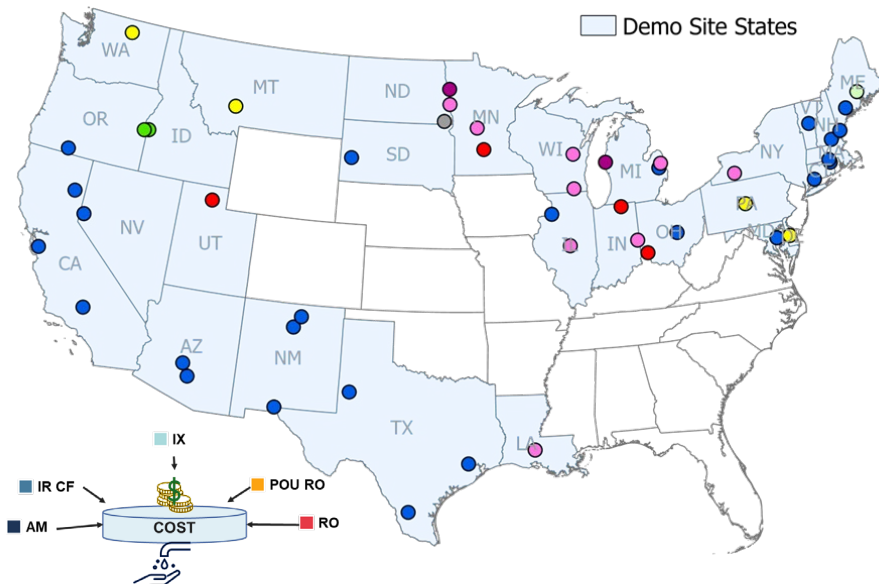

USEPA adopted
interim arsenic
MCL of 50 µg/L

The National Research Council **recommended lowering the MCL** allowed for arsenic in drinking water of 50 µg/L

USEPA propose a new arsenic MCL of 10 µg/L and identified seven best available technologies (BATs)

Deadline to meet the **new arsenic MCL standard of 10 µg/L**


Revisiting Demo Sites

"How are they doing now?"

Treatment Technology	No. of Systems	Design Flow Rate (gpm)	Total Capital Cost (\$)	Total Capital Unit Cost (\$/kgal)	Total O&M Costs (\$/kgal)
AM (<100 gpm)	17	10–75	14,000–228,309	0.41	6.47
IR/CF (<100 gpm)	6	20–96	55,423–161,560	0.38	1.39
AM (≥100 gpm)	11	100–640	74,840–305,000	0.14	1.76
IR/CF (≥100 gpm)	12	140–770	216,876–427,407	0.19	0.28
IX (≥100 gpm)	2	250–540	286,388–395,434	0.17	0.49

Key Considerations: Treatment Technology, Design Flow, Series v. Parallel Config., Media Type

RO2: Statistical methods to quantify the impact of treatment design on performance and compliance.

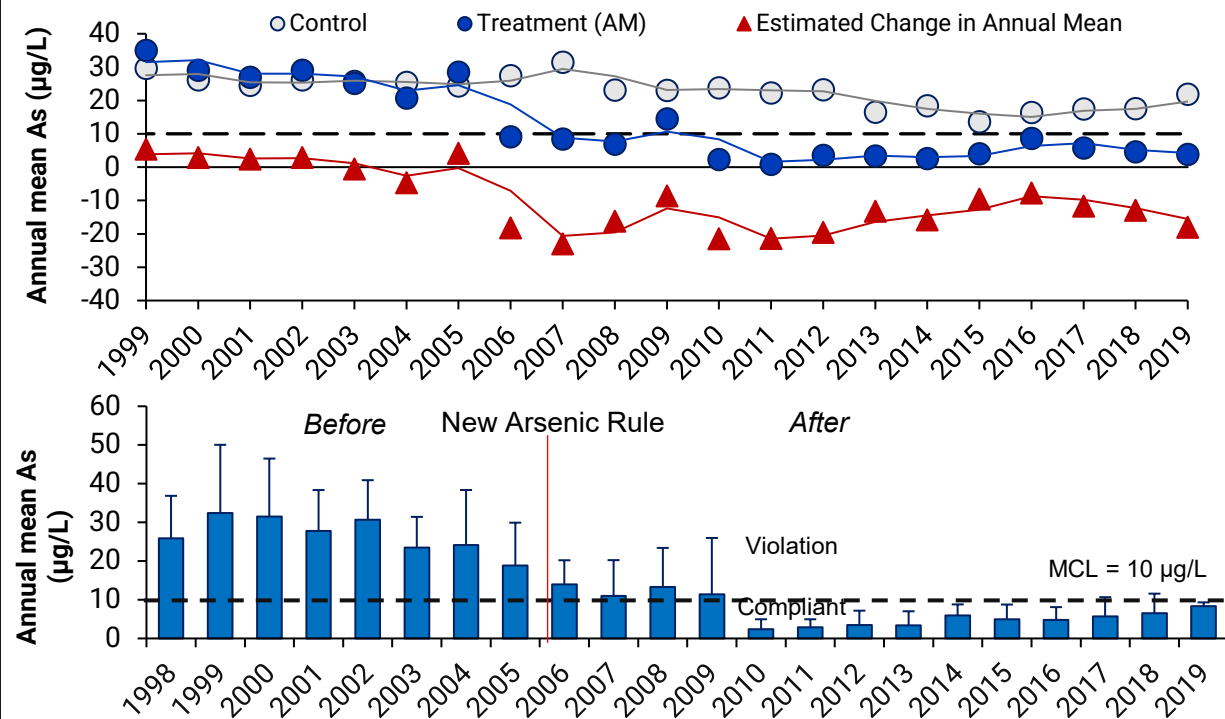

RO3: Cost estimate to bring utilities to compliance.

